



PROVEN PERFORMER


Vended Laundry

STGBXASP304NW22 (Stack Washer/Dryer - gas)

STEBXASP304NW22 (Stack Washer/Dryer - electric)

Stack Washer/Dryer Features

- Improved suspension with new out-of-balance logic manages and redistributes unbalanced loads for uninterrupted wash cycles
- Water use as low as 44.3 litres per cycle to reduce operating costs
- Extended Tumble helps eliminate wrinkling by tumbling for two minutes at 20 minute intervals if the dryer door isn't opened
- Just like their stand-alone counterparts, Speed Queen stacks are 100 percent front serviceable to limit downtime for easy service access



STACKABLE
UNIT



STANDARD STAINLESS
STEEL WASHING DRUM



LARGE DOOR
OPENING



LOW WATER
CONSUMPTION



LOW ENERGY
CONSUMPTION



COMPACT
DESIGN



STGBXASP304NW22
STEBXASP304NW22

	STGBXASP304NW22 (Gas) / STEBXASP304NW22 (EI.)	
GENERAL DETAILS		
Type	Stack Washer	Stack Dryer
Control	Electronic	Electronic
Control location	Front	Front
Actuation	Prep for Coin	Prep for Coin
DRUM		
Capacity	[kg]	10.2
Cylinder volume	[l]	96.8
DRUM SPEED		
G-Force		n/a
Spin speed	RPM	1200
MOTOR		
Motor power	[kW]	0.67
CABINET		
Cylinder finish	Stainless	Galvanized
Colour	White	White
Door type (solid/window)	Window	Window
HEATING		
Heat source	Boiler Fed	Gas /Electric
Heating power	[BTU]	n/a
CONNECTION		
Gas inlet connection	[mm]	n/a
Exhaust outlet diameter	[mm]	n/a
Exhaust airflow	[l/sec]	n/a
Water inlet	["]	3/4
Water pressure	[Bar]	1.4-8.3
Pump Drain	[mm]	47
OPERATION		
Cycles	5	4
Water temperatures	3	n/a
Water consumption per cycle litres*	44.3	n/a
Cycle indicator lights	Yes	
POWER		
Electrical requirements	[V/Hz/Phase]	220-240/50/1 (2W +G)
TRANSPORT DATA		
Net weight	[kg]	175
Shipping weight	[kg]	189
Dimensions H×W×D	[mm]	1986×683×704
Packing dimensions H×W×D	[mm]	2032×864×762
Volume	[m³]	1.34


* Based on DOE test procedure



Dimensions

Stack Washer/Dryer – gas

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
STGBXASP304NW22 STEBXASP304NW22	1678*	1447*	597	213	610	203	391	59	938*	368*	1140*	813*	683	1184*	1986*	52	704	38

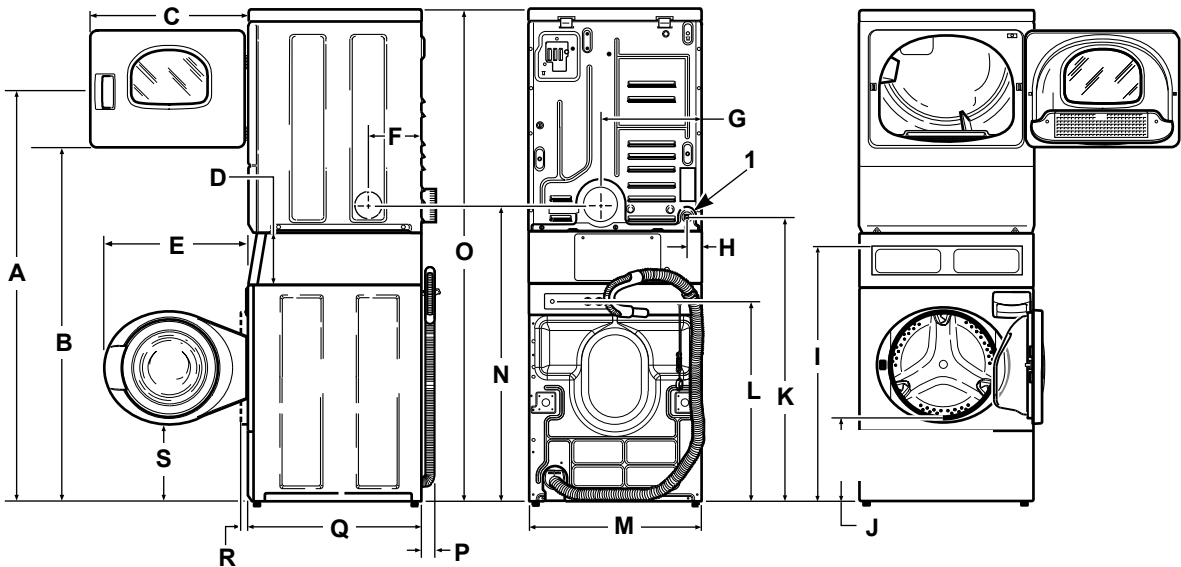

All measurements are in mm. *With levelling legs turned into base.

NOTE: Exhaust openings are 102 mm metal ducting.



